

Mode Localization in Quasi Periodic Cyclic Structures

Reyolando F. Brasil¹, Elizabete O. Silva¹, Henrique C. Margon¹

¹CECS, Federal University of ABC

Al. da Universidade, s/n, 09606-045, S. Bernardo do Campo, SP, Brazil

reyolando.brasil@ufabc.edu.br, elizabete.o@ufabc.edu.br

Abstract. In this work, we study the phenomenon of localization of vibration modes in quasi-periodic cyclic structures with linear behavior. They are composed of nominally identical substructures loosely coupled together, taking into account possible small imperfections. Such linear systems in the face of the disorder caused by small imperfections, can lead to the confinement of vibrational energy in certain regions of the structure, a phenomenon known as Mode Localization. This phenomenon can cause catastrophic failure due to high vibration amplitude and fatigue. The identification and study of the location effect from a modal perspective, as well as the response of the structure and its components to dynamic requests is of fundamental importance, as it is a diagnostic tool for possible preventive mitigation actions or even use of this phenomenon in damping of the system. Through the implementation of computer simulation via MATLAB® software, based on the Finite Element Method, the distribution, interference and consequence of vibrational energy on the adopted model are analyzed with reference to the periodic and ordered or aperiodic and disordered dynamic characteristics. The so-called “real case” considers the small variations in characteristics (length, stiffness, attack angle), resulting from manufacturing tolerances or FOD (Foreign Object Debris) impact. This work presents graphically the amplitude of normalized vibration amplitude resulting from the appearance of the phenomenon of localization of vibration modes in the substructures, which can be restricted to one or a few of them.

Keywords: mode localization, vibrational energy, turbine blades, finite element method.

1 Introduction

The study of vibrations is found in several branches of engineering, and recurrently in aeronautics. Even under optimal conditions, any aircraft engine naturally suffers the effect of vibration resulting from its dynamic behavior. To ensure the safe operation of modern turbofan units, it has become essential to assess their vibrational conditions. The main concern in turbine blades are the large dynamic loads applied to the substructure due to vibrations and high rotational speeds. This can lead to a destructive scenario, with deterioration of the systems, fatigue cracks, and failures.

The symmetry of a turbine is a characteristic that defines it as a periodic and ordered structure, due to its composition of identical substructures, i.e., they should have the same stiffness, mass etc., coupled by the turbine shaft. These sub-structures, the blades, may not be identical structures due to manufacturing imperfections, FOD (Foreign Object Debris) collisions, among other conditions that can change the dynamic characteristics of these blades. These variations may lead to the blades deviating from their nominal design, which is called mistuning. Dynamic systems are very sensitive to structural parameters, since natural frequencies and vibration modes are functions of the geometric characteristics and properties of the materials that compose them.

Whereas the ideal model distributes the vibrational energy through all the components of the system, when mode localization occurs, vibrational energy may be confined to just a few or even one component. Thus, design and maintenance analysis must include effects of the random or deliberate presence of disorder in their characteristics which results in a phenomenon known as vibration mode localization. This phenomenon was first described by Anderson (1958) in the context of Solid Physics a work that earned him a Nobel Prize.

Dye and Henry (1969) developed an approximated equation for the turbine blades response, using a discrete parameter model. El-Bayoumy and Srinivasan (1975) concluded that the blade stress was frequency dependent,

and Ewins (1969) performed a theoretical-experimental study and found a good agreement between the calculated and measured frequencies and mode shapes. Bendiksen and Valero (1987) investigated the case of the mode localization for unsynchronized cyclical symmetrical structures. The mode localization phenomenon in periodic structures of linear behavior was extensively discussed by Reyolando MLRF Brasil and Mazzilli (1995) also worked on the subject.

The classic mistuning affects usually mechanical systems. They are length, stiffness, and mass, arising from manufacturing tolerances. This work adds the occurrence of mistuning as a result of blade twist angle deviation and mistuning caused by a blade impact situation with a FOD - Foreign Object Debris. The study of the origin of mistuning initiated by Armstrong (1956) and Tobias and Arnold (1957). Whitehead (1966) focused on the influence for the forced vibration behavior of systems with blades. Authors Ewins (1969) and Dye and Henry (1969) followed the same rationale. Authors Yuan et al. (2017) and Castanier and Pierre (2006) present a recent work with a literature review on the problems of mistuning in systems of a blisk, and its implications for the propagation of uncertainty associated with dynamics of aeronautical engine systems.

Pierre and Murthy (1992), Madden, Epureanu, and Filippi (2012), Chan and Liu (2000), Duffield and Agnes (2001), Fang et al. (2006), Repetckii, Nguyen, and Ryzhikov (2017), Rodriguez and Kauffman (2019), Baker and Capece (2002) who addressed the vibration localization modes due to high degree of mistuning of mass, stiffness and geometry. R. Brasil and Hawwa (1995); Dhar and Sharan (1997); Fang et al. (2006) put forward the mistuning of rigidity.

Dye and Henry (1969); El-Bayoumy and Srinivasan (1975), Bendiksen and Valero (1987), Hemberger, Filsinger, and Bauer (2014), Capiez-Lernout et al. (2005) highlighted mis tuning due to manufacturing tolerances or different blade attachments that cause abnormal stresses due to vibrational confinement. Finally, authors Judge, Pierre, and Mehmed (2001), Reyolando MLRF Brasil and Costa (2007), Chen et al. (2019) discuss the effects of varying the magnitude of mass and its position in the system, generating energy confinement of vibrational energy.

In this work, we develop an algorithm to analyze the localization of vibration modes in periodic or non-periodic structures, particularly in turbofan blades, simplifying them as a cantilever beam with light coupling, their dynamic properties approximated by Rayleigh's Method, also considering the effect of deviation on length, stiffness, attack angle and caused by impact with an FOD.

2 Case Study

The study of the phenomenon of localization of modes is applied to the fan blades of an aeronautical turbine, the CFM56 engine was chosen as a case study. The CFM56 is a family of aeronautical engines with turbofan reaction technology that uses gas turbines, produced by CFM International, adopted in aircraft such as the Boeing 737, the Airbus A320, 340-300. About fan blades, Center (2003) informs that there are 44 titanium alloy blades. The adopted alloy is used for its high strength and weight saving characteristics. The geometric dimensions of the blades from CFM56-2 are showed by Lane (1989), see Fig. 1, $L = 0.5999$ m, $W_1 = 0.1161$ m, $W_2 = 0.1470$ m, $T_1 = 0.075$ m, $T_2 = 0.0040$ m.

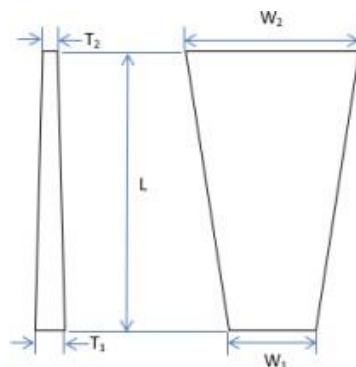


Figure 1. Fan blade geometry (no pitch, attack or camber)

In this paper, "mistuning" is considered as the small changes in physical properties of the substructures, the turbine themselves, that lead to significant mode localization. The system undergoes the mistuning in length, mistuning stiffness, mistuning stagger angle, and mistuning due to impact with a FOD. As considered, in order to display the phenomenon, a random choice between 7.5% of nominal values of those properties was adopted. Length mistuning is performed by entering a ΔL at the nominal length l . The stiffness mistuning occurs with introducing a ΔE in the elastic modulus E . The mistuning of the blade's stagger angle occurs with the introduction of a ΔI in the inertia I . The magnitude of all disturbances is randomly generated.

Based on the characterization of each substructure using Rayleigh's Method and the Finite Element Method, we define the localization of the vibration modes in aeronautical turbine blades, using MATLAB, which is a high-performance interactive software for matrix analyses. The analysis of the problem involves the construction of specific codes for each deviation, but there are fundamental steps inherent to all codes. They are: input data; definition of ideal or actual analysis; definition of the random vector of disturbance; generation of the local stiffness matrix for each element of the structure; generation of the global stiffness matrix of the structure; generation of the local mass matrix for each element of the structure; generation of the structure's global mass matrix; solving the problem of eigenvalues and eigenvectors (natural frequencies and vibration modes) and output results.

3 Numerical Results

The simulation, for the ideal or real analysis, introduces the cases of mistuning of length, stiffness, angle, and impact with FOD, in the system, through an algorithm. Results show that when the substructures are the same, without deviation, the vibration modes are homogeneously extended throughout the system, and the frequencies are repeated with approximately the same values for each of the substructures. When small mistuning and a slight coupling are present, vibration modes are localized in some or even in one of the substructures, and the respective frequencies change significantly between substructures, as shown in Tab. 1.

Figure 2 displays normalized modal displacements of the 10 blades of the fan, for the three first vibration modes, for ideal (perfect tuning) and real (mistuning) situations. In this Figure, for each case, non-mistuning shows replicability of results despite particularities in each algorithm and symmetrical or anti-symmetrical patterns from a source blade. Fig. 2 shows the phenomenon under length mistuning and non-mistuning. This mistuning shows a strong confine vibration in comparison with the other cases. Fig. 3 displays that the system undergoes the stiffness mistuning and non-mistuning. Fig. 4 demonstrates attack angle mistuning and non-mistuning. Fig. 5 indicates the phenomenon of localization originated from debris collision.

The confinement factor of vibrational energy is the relational ratio between the disorder of the system and the degree of coupling. The coupling factor is constant in each case, isolating the effect of disorder on the results. It could infer that the length, compared to the others, has the highest disorder force, and therefore the highest degree of localization, while the impact with FOD has the lowest degree of confinement. The difference in frequency between the blades is most affected in the case of attack angle mistuning.

Table 1: Numerical results for frequency [Hz] in the case of mistuning of length, stiffness, angle and impact with FOD

Blade	Without mistuning	Mistuning of the length	Mistuning of the stiffness	Mistuning of the angle	FOD
1	115.5833	105.2160	113.8734	287.3656	113.6947
2	115.6805	130.4781	114.3108	288.9083	113.8934
3	115.9621	111.6699	116.8424	300.5923	116.1127
4	116.3993	128.0449	117.1173	301.6433	117.7362
5	116.9478	113.7640	118.6106	311.7201	117.9414
6	117.5529	123.6882	119.9809	315.1769	118.8469
7	118.1549	117.5990	120.3084	318.1176	119.3176
8	118.6954	114.8617	120.4053	318.1479	119.7818
9	119.1225	122.6369	121.4939	320.7045	120.6751
10	119.3960	125.4527	122.0146	323.4081	121.6856

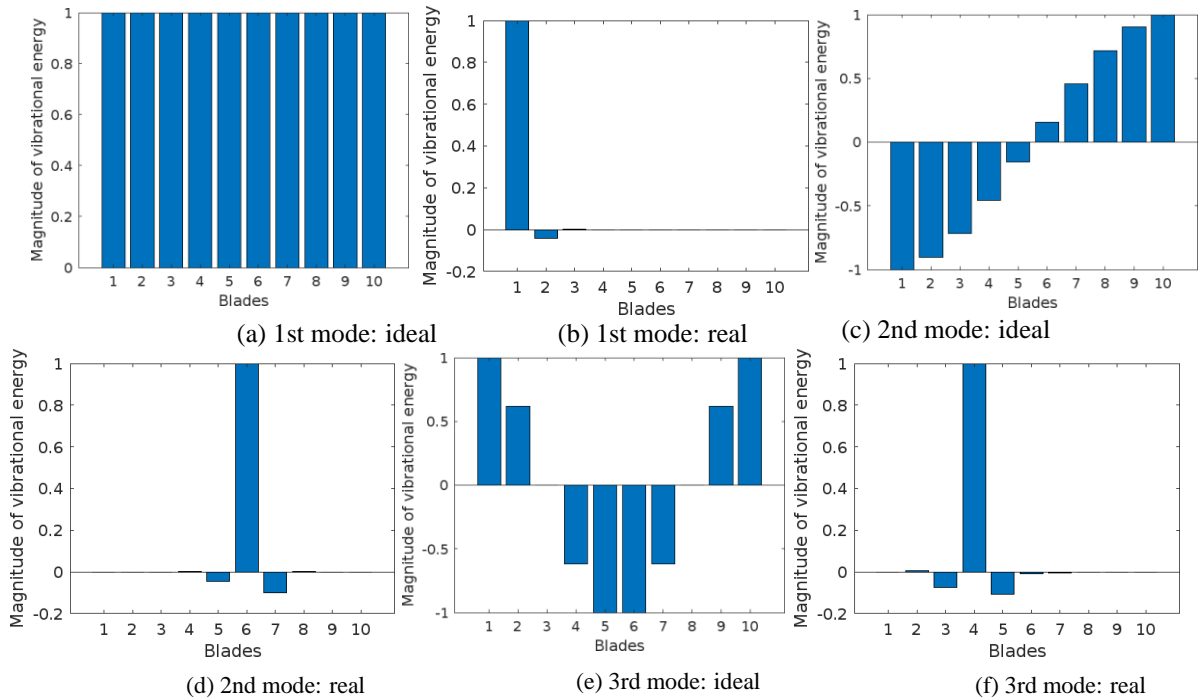


Figure 2: Length mistuning case: Blade vibration amplitudes vs. number of blades. The periodic in the left side and quasi-periodic in the right side, for the ten vibration modes.

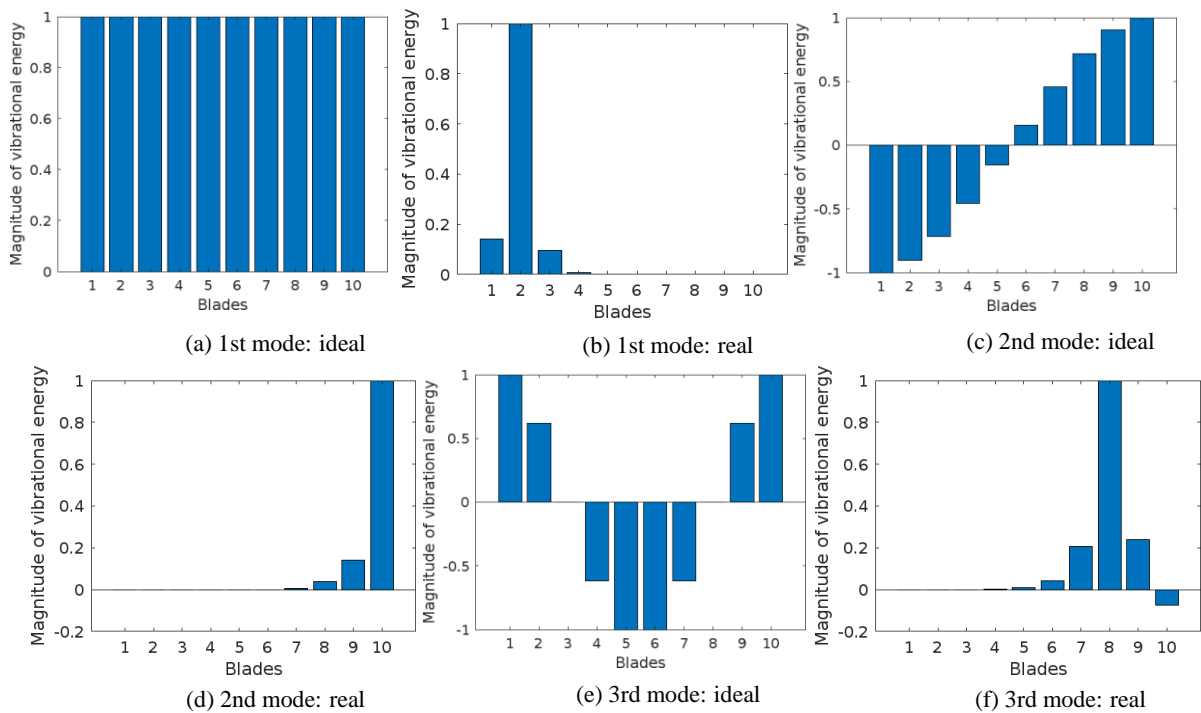


Figure 3: Stiffness mistuning case: Blade vibration amplitudes vs. number of blades. The periodic in the left side and quasi-periodic in the right side, for the ten vibration modes.

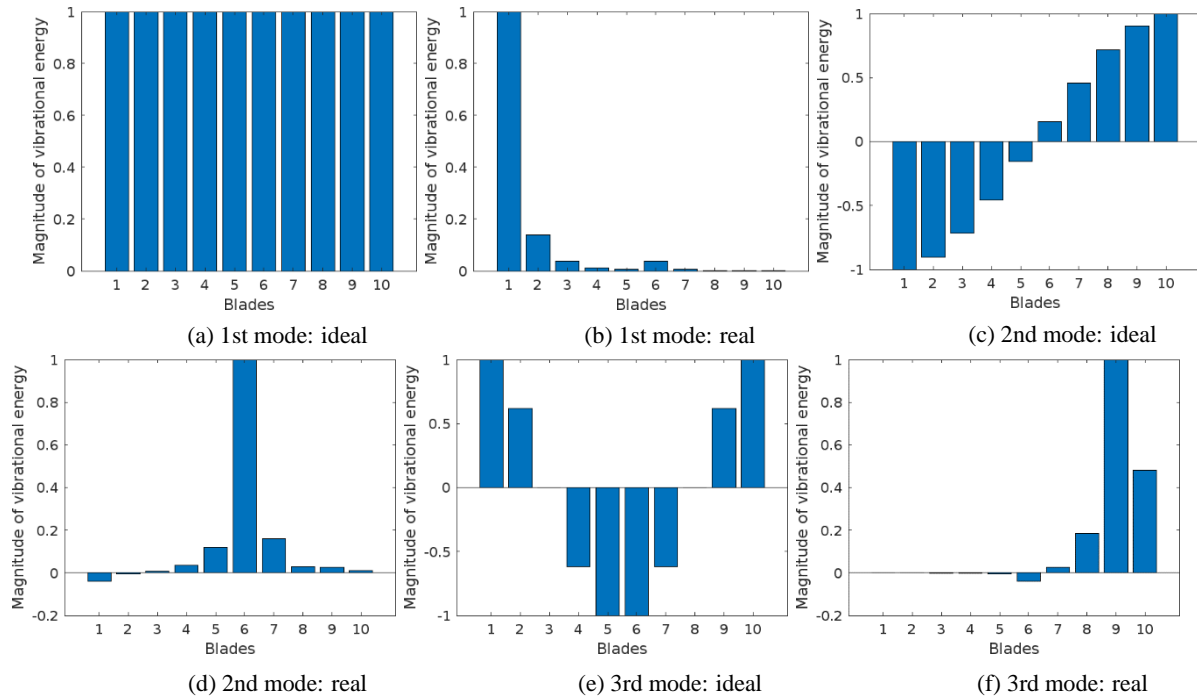


Figure 4: Attack angle mistuning case: Blade vibration amplitudes vs. number of blades. The periodic in the left side and quasi-periodic in the right side, for the ten vibration modes.

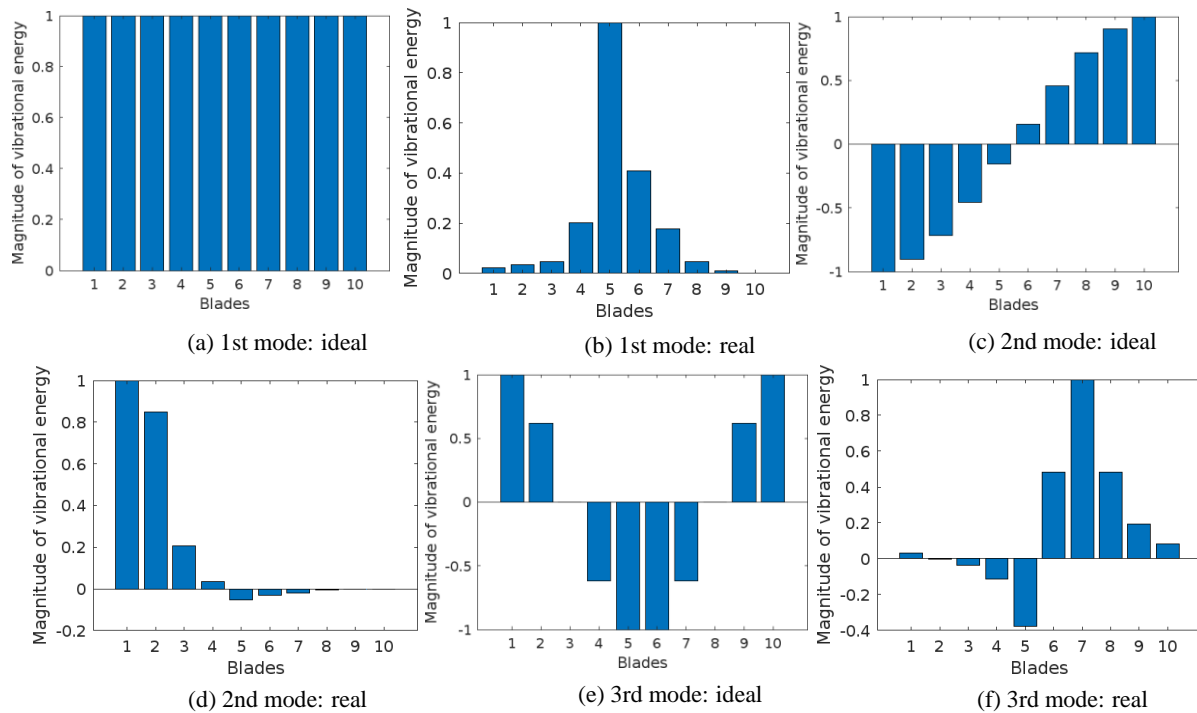


Figure 5: Mistuning due to FOD's impact case: Blade vibration amplitudes vs. number of blades. The periodic in the left side and quasi-periodic in the right side, for the ten vibration modes.

4 Conclusions

This work was successful in obtaining the phenomenon of localization of vibration modes in aeronautical turbine blades under imputed mistuning. The determination of frequencies and modes of vibration is a generalized problem of eigenvalues and eigenvectors solved numerically. Dynamic characteristics of the variable section blades were obtained via Rayleigh's method.

The mathematical model was implemented via a computational algorithm to evaluate the phenomenon of mode localization in turbine blades, taking into account the elastic and geometric stiffness, due to large centrifugal forces. It was successfully implemented in the MATLAB environment. This can be used generically for several turbine models and the insertion of random perturbations.

The occurrence of mode localization in a quasi-periodic aeronautical system such as a turbine is still little studied. As far as we know, assessment of the effect of angle and debris collision disturbances on this phenomenon is a novel contribution to this study.

Acknowledgements. The authors acknowledge support by FAPESP and CNPq, both Brazilian research funding agencies.

Authorship statement. The authors hereby confirm that they are the sole liable persons responsible for the authorship of this work, and that all material that has been herein included as part of the present paper is either the property (and authorship) of the authors, or has the permission of the owners to be included here.

References

- [1] Anderson, Philip W (1958). "Absence of diffusion in certain random lattices". In: *Physical review* 109(5), p. 1492.
- [2] Armstrong, EK (1956). "An investigation into the coupling between turbine disk and blade vibrations". PhD thesis. University of Cambridge.
- [3] Baker, John and Vincent Capece (2002). "Simulation Studies on Vibration Control of Compressor Blades Including Foundation Flexibility Effects". In: 38th AIAA/ASME/SAE/ASEE Joint Propulsion Conference & Exhibit, p. 4074.
- [4] El-Bayoumy, LE and AV Srinivasan (1975). "Influence of mistuning on rotor-blade vibrations". In: *AIAA Journal* 13(4), pp. 460–464.
- [5] Bendiksen, OO and NA Valero (1987). "Localization of natural modes of vibration in bladed disks". In: *American Society of Mechanical Engineers Digital Collection*.
- [6] Brasil, Reyolando MLRF and SNJ Costa (2007). "Mode Localization by Using the Dynamical Basis Approach". In.
- [7] Brasil, Reyolando MLRF and Carlos EN Mazzilli (1995). "Influence of loading on mode localization in periodic structures". In.
- [8] Brasil, RM and MA Hawwa (1995). "The localization of buckling modes in nearly periodic trusses". In: *Computers & structures* 56(6), pp. 927–932.
- [10] Capiez-Lernout, Evange'line et al. (2005). "Blade manufacturing tolerances definition for a mistuned industrial bladed disk". In: *J. Eng. Gas Turbines Power* 127(3), pp. 621–628.
- [11] Castanier, Matthew P and Christophe Pierre (2006). "Modeling and analysis of mistuned bladed disk vibration: current status and emerging directions". In: *Journal of Propulsion and power* 22(2), pp. 384–396.
- [12] Center, Customer Training (2003). CFM56-7B Training Manual: Basic Engine.
- [13] Chan, HC and JK Liu (2000). "Mode localization and frequency loci veering in disordered engineering structures". In: *Chaos, Solitons & Fractals* 11(10), pp. 1493–1504.
- [14] Chen, Yugang et al. (2019). "Vibration reduction of the blisk by damping hard coating and its intentional mistuning design". In: *Aerospace Science and Technology* 84, pp. 1049–1058.
- [15] Dhar, D and AM Sharan (1997). "Free-vibration analysis of turbine blades using nonlinear finite element method". In: *AIAA journal* 35(3), pp. 590–591.
- [16] Duffield, Colin and Gregory Agnes (2001). "An experimental investigation on periodic forced vibrations of a bladed disk". In: 19th AIAA applied aerodynamics conference, p. 1668.
- [17] Dye, RCF and TA Henry (1969). "Vibration amplitudes of compressor blades resulting from scatter in blade natural frequencies". In.
- [18] Ewins, D J (1969). "The effects of detuning upon the forced vibrations of bladed disks". In: *Journal of Sound and Vibration* 9(1), pp. 65–79.
- [19] Fang, X et al. (2006). "Crack induced vibration localization in simplified bladed-disk structures". In: *Journal of sound and vibration* 291(1-2), pp. 395–418.
- [20] Hemberger, David, Dietmar Filsinger, and Hans-Jo'rg Bauer (2014). "Identification of mistuning for casted turbine wheels of small size". In: *Turbo Expo: Power for Land, Sea, and Air*. Vol. 45585. American Society of Mechanical Engineers, V01BT24A002.

- [21] Judge, John, Christophe Pierre, and Oral Mehmed (2001). “Experimental investigation of mode localization and forced response amplitude magnification for a mistuned bladed disk”. In: *J. Eng. Gas Turbines Power* 123(4), pp. 940–950.
- [22] Lane, Alan D (1989). Development of an advanced fan blade containment system. Tech. rep. ADVANCED STRUCTURES TECHNOLOGY INC PHOENIX AZ.
- [23] Madden, Andrew, Bogdan I Epureanu, and Sergio Filippi (2012). “Reduced-order modeling approach for blisks with large mass, stiffness, and geometric mistuning”. In: *AIAA journal* 50(2), pp. 366–374.
- [24] Pierre, Christophe and Durbha V Murthy (1992). “Aeroelastic modal characteristics of mistuned blade assemblies-mode localization and loss of eigenstructure”. In: *AIAA journal* 30(10), pp. 2483–2496.
- [25] Rayleigh, John William Strutt Baron (1896). *The theory of sound*. Vol. 2. Macmillan.
- [26] Repetckii, O, Tien Quyet Nguyen, and I Ryzhikov (2017). “Investigation of vibration and fatigue life of mistuned bladed disks”. In: *Proceedings of the international conference—Actual issues of mechanical engineering*, pp. 702–707.
- [27] Rodriguez, Andres M and Jeffrey L Kauffman (2019). “A new path toward mitigating vibration localization due to mistuning in cyclic structures”. In: *AIAA Scitech 2019 Forum*, p. 2259.
- [28] Tobias, SA and RN Arnold (1957). “The influence of dynamical imperfection on the vibration of rotating disks”. In: *Proceedings of the Institution of Mechanical Engineers* 171(1), pp. 669–690.
- [29] Whitehead, DS (1966). “Effect of mistuning on the vibration of turbo-machine blades induced by wakes”. In: 8(1), pp. 15–21.
- [30] Yuan, Jie et al. (2017). “Efficient computational techniques for mistuning analysis of bladed discs: a review”. In: 87, pp. 71–90.